

# 3500/10E Power Supply

Bently Nevada\* Asset Condition Monitoring

---



## Description

The 3500 Encore Power Supplies are half height modules and must be installed in the specially designed slots on the left side of the 3500 ENCORE System rack.

Dual redundant or single 3500/10E Power Supplies are offered in the 3500 ENCORE System rack.

The 3500 ENCORE Power Supply accepts a wide range of input voltages and converts them to voltages acceptable for use by other 3500 Encore modules:

- Universal AC Input

**Note:** The /10E power supply is only for use in the 3500 ENCORE system (not for use in the 3500 ENCORE rack upgrade).



## Specifications

### Inputs

#### Voltage Options:

#### Voltage ac

Input  
Voltage

85 to 264 Vac

Input  
Frequency

47 to 63 Hz

#### Full Rack Current Draw:

#### AC

3.2 A rms (maximum).

---

### Outputs

#### Front Panel LEDs

#### Supply OK LED:

Indicates when the power  
supply is operating properly.

---

### Environmental Limits

#### Operating Temperature:

For 8 monitors or fewer:  
-20 °C to +65°C (-4 °F to +150°F).

For 10 monitors or fewer:  
-20 °C to +60°C (-4 °F to +140°F).

For 12 monitors or fewer:  
-20 °C to +55°C (-4 °F to +131°F).

For 14 monitors or fewer:  
-20 °C to +50°C (-4 °F to +122°F).

#### Storage Temperature:

-30 °C to +85 °C (-22 °F to +185  
°F).

#### Humidity:

95%, non-condensing.

The power supply will support the system monitor and up to 12 additional monitors at +65°C (requires a minimum of 300 ft/min moving air across the rack).

---

## Compliance and Certifications

### EMC

#### Standards:

EN 61326-1:2006  
Emissions and Immunity

#### European Community Directives:

EMC Directive 2004/108/EC

### Electrical Safety

#### Standards:

EN 61010-1:2010

#### European Community Directive:

2006/95/EC Low Voltage

For further certification and approvals information please visit the following website:

[www.ge-mcs.com/bently](http://www.ge-mcs.com/bently)

---

## Hazardous Area Approvals

### North American:

#### Approval Option (01)

Class 1, Div 2

Groups A, B, C, D

T4 @ Ta = -30 °C to +65 °C

(-4 °F to +150 °F)

For further certification and approvals information please visit the following website:

[www.ge-mcs.com/bently](http://www.ge-mcs.com/bently)

---

## Physical

### Power Supply Module

#### Dimensions (Height x Width x Depth):

83.82 mm x 40.39 mm x 236.73  
mm (3.30 in x 1.59 in x 9.32 in).

#### Weight:

1.81 kg (4 lb.).

**Power Input Module**

**Dimensions (Height x Width x Depth):**

74.17 mm x 40.39 mm x 106.93 mm (2.92 in x 1.59 in x 4.21 in).

**Weight:**

1.45 kg (3.20 lb.).

---

**Rack Space Requirements**

**Power Supply Module:**

1 half-height front slot, located on the left side of the rack.

---

**Ordering Information**

**3500/10E-AXX-BXX-CXX**

**A:** Power Supply Top

**0 1** 110/220 VAC

**B:** Power Supply Bottom

**0 0** None

**0 1** 110/220 VAC

**C:** Agency Approval Option

**0 0** None

**0 1** CSA/NRTL/C

---

**Spares**

**100M4133**

AC Power Supply Module

**100M4135**

AC Power Input Module

**100M3339-01**

Power Supply Operations and Maintenance Manual

**100M5903**


Fuse 5A 250 VAC

Graphs and Figures



Power Supplies OK LED

Figure 1: Front View of the 10E Power Supply

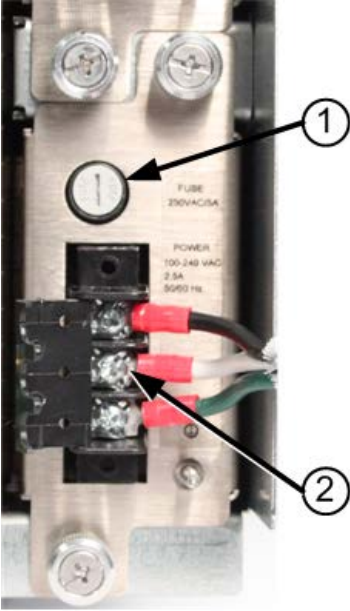

- 1. Fuse
- 2. Terminations

Figure 2: Power Input Module (PIM)

\* Denotes a trademark of Bently Nevada, Inc., a wholly owned subsidiary of General Electric Company.

© 2013 Bently Nevada, Inc. All rights reserved.

Printed in USA. Uncontrolled when transmitted electronically.

1631 Bently Parkway South, Minden, Nevada USA 89423

Phone: 775.782.3611 Fax: 775.215.2873

[www.ge-mcs.com/bently](http://www.ge-mcs.com/bently)