


350500 Dynamic Pressure Charge Amplifier

Bently Nevada™ Asset Condition Monitoring

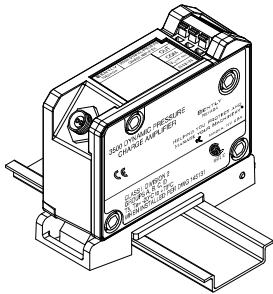

Description

The 350500 Dynamic Pressure Charge Amplifier (DPCA) is a component in a dynamic pressure sensing system. This sensing system, which monitors pressure pulsations that result from combustion instability in gas turbine engines, consists of a charge-coupled piezoelectric pressure sensor, low noise interconnect cable, 350500 charge amplifier, and monitoring device.

The dynamic pressure sensor should be a high temperature piezoelectric type that converts dynamic pressure to an output signal scaled in pico-coulombs per unit of pressure. The 350500 charge amplifier design allows its use with a number of sensors designed to monitor combustion instability.

The interconnect cable, which connects the sensor with the charge amplifier, is a specially designed low-noise, environmentally robust cable. The 350500 DPCA offers two interconnect cable options.

The 350500 charge amplifier converts the sensor charge signal to a low impedance voltage output signal. This signal is suitable for Bently Nevada monitors such as the 3500/64 Dynamic Pressure Monitor. The electrical interface from the monitor to the charge amplifier, which consists of -24 Vdc power, common, and signal, is the same as that for a Bently Nevada Proximitor®. Appropriate safety barriers can be used between the charge amplifier and the monitoring device.

Specifications

All Specifications are at 23 °C ± 2 °C, (73.4 °F ± 3.6 °F)

Installation

Install per Installation Drawing 145131 in a safe area or CSA\NRTL\C Class I Division 2, Group A, B, C, or D hazardous area or Class 1 Zone 2 IIC.

Install per Drawing 146821 for Intrinsically Safe Division 1 or Class 1 Zone 0 IIC applications.

350500 Electrical Specifications

Power:

Supply Voltage (at the module)

- 19.60 Vdc to - 26 Vdc when no safety barriers are used

-17.75 Vdc to - 26 Vdc when safety barriers are used.

Supply Current

14.68 mA maximum with no load
11.69 mA typical with no load

Signal:

Input Sensitivity

Ordered option:

13.8 pC/psi (200 pC/bar)

16 pC/psi (232 pC/bar)

1200 pC/psi (17,404 pC/bar)

12 pC/psi (174 pC/bar)

60 pC/psi (870 pC/bar)

Expected Sensor Pole-to-Pole Capacitance for different Input Sensitivities	Input Sensitivity Option in pC/psi:	Nominal Pole-Pole Capacitance in picofarads:
	13.8	320
	16	60 to 90
	1200	6,300
	12	100
	60	300

Output Sensitivity

Ordered option:
100 millivolt/psi (1.45 Volt/bar)±
2% @ 150 Hz

Dynamic Range

±50 psi pk

Common Mode Rejection

-40 dB or better in the passband.

Output Resistance Frequency Response

50 ohm typical

Ordered option: High Low
(See Figure 1)

Physical

Dimensions:

See figures 3 and 4

Weight:

246 grams (8.7 oz)

Mounting:

Panel mount and 35 mm DIN rail mount options. (See Figures 3 and 4)

Power/Signal Connector and Wiring:

Three-conductor SpringLoc terminal strip for power, instrument common, and signal output. Accepts wire sizes of: 0.2 mm² to 1.5 mm² (16 to 24 AWG) without ferrules, and 0.25 mm² to 0.75 mm² (18 to 23 AWG) with ferrules. Recommended field wiring is a three-conductor shielded triad. Maximum length of 305 metre (1000 feet) between the charge amplifier and the monitor.

**Sensor
Connector:**

Two-pin LEMO EXG.0B.302.HLN
(mates to LEMO FGG.0B.302 or
equivalent)

Environmental Limits

**Operating
Temperature:**

-20 °C to +70 °C (-4 °F to +158 °F)

**Storage
Temperature:**

-40 °C to + 85 °C (-40 °F to +185
°F)

**Operating and
Storage
Humidity:**

0% to 95% relative non-
condensing

Hazardous Area Approvals

CSA/NRTL/C

Class I Division 2, Groups A, B, C, D
Class I Division 1, Groups A, B, C, D
CSA Class I Zone 0 Ex ia IIC T5
Class I Zone 2 Ex nA IIC T5

Europe:

Zone 0 EEx ia IIC T5
BAS 00ATEX1237X
Zone 2 EEx nA II
BAS 00ATEX3238U

International:

Ex ia IIC T5
IEC Ex BAS 05.0002
Ex nA II
IEC Ex BAS 05.0003U

145536 Interconnect Cable Specifications

Unless noted otherwise all Specifications are at 23°
±2°C, (73.4°F ±3.6° F)

The 145536 Interconnect Cable is a double shielded,
double jacketed, low noise treated, twisted pair cable
designed specifically for use with the 350500 DPCA.

**Sensor
Connector:**

MS3106F-10SL-4S
(Mil spec two pin connector)

**Charge Amp
Connector:**

LEMO FGG.0B.302.CLAD.56 or
equivalent

**Cable Operating
Temperature:**

150° Celsius maximum (302° F)

**Conductor to
conductor
capacitance:**

30 pF/ft nominal

145693 Interconnect Cable Specifications

Unless noted otherwise all Specifications are at 23°
±2 °C, (73.4 °F ±3.6 °F)

The 145693 Interconnect Cable is a double shielded,
double jacketed, low noise treated, twisted pair cable
designed specifically for use with the 350500 DPCA.
It can be ordered in lengths from 1 to 15 metres in 1-
metre increments.

**Sensor
Connector:**

M83723/95G10207
(Mil spec two pin connector)

**Charge Amp
Connector:**

LEMO FGG.0B.302.CLAD.56 or
equivalent

**Cable Operating
Temperature:**

200 °C maximum (392° F)

**Conductor to
conductor
capacitance:**

70 pF/ft nominal

Housing Specifications

330181 Housing.

Specifications and Ordering Information
Part Number 145828-01
Rev. L (04/07)

See Data Sheet 141195-01 for Specifications and Ordering Information. This housing is used with 3300 XL Proximitor and can also be used for the 350500.

Up to six (6) DPCA's can be mounted in panel mount configuration and up to eight (8) in DIN mount configuration.

Ordering Information

Dynamic Pressure Charge Amplifier

350500-AA-BB-CC-DD-EE

A: Input Sensitivity Option

- 00** 16 pC/psi (232 pC/bar)
- 01** 1200 pC/psi (17,404 pC/bar)
- 02** 13.8 pC/psi (200 pC/bar)
- 03** 12 pC/psi (174 pC/bar)
- 04** 60 pC/psi (870 pC/bar)

B: Low Pass Frequency Option

- 00** High
 - 01** Low
- (See Figure 1)

C: Output Sensitivity Option

- 00** 100 mV/psi (1.45 V/bar)

D: Mounting Option

- 00** Panel Mount Hardware
- 01** 35 mm DIN Mount Hardware
- 02** No Mounting Hardware

E: Approvals

- 01** CSA/NRT/L Class 1 Div 2, Groups A,B,C,D
- 05** Multi Agency Approvals

Interconnect Cables

145536 -01

This cable is 15.24 metres long (50 feet) and has a MS3106F-10SL-4S sensor connector.

145536 -02

Identical to -01 with overmold on the sensor side connector.

145693 - AA

This cable has a M83723/95G10207 sensor side connector and can be ordered in lengths from 1 metre to 15 metre in 1-metre increments

A: Length option

01 to 15 metres in 1-metre increments

Frequency Response Plots

Typical Low Frequency Corner vs. External Capacitance (Low Pass filter option set to 'High')

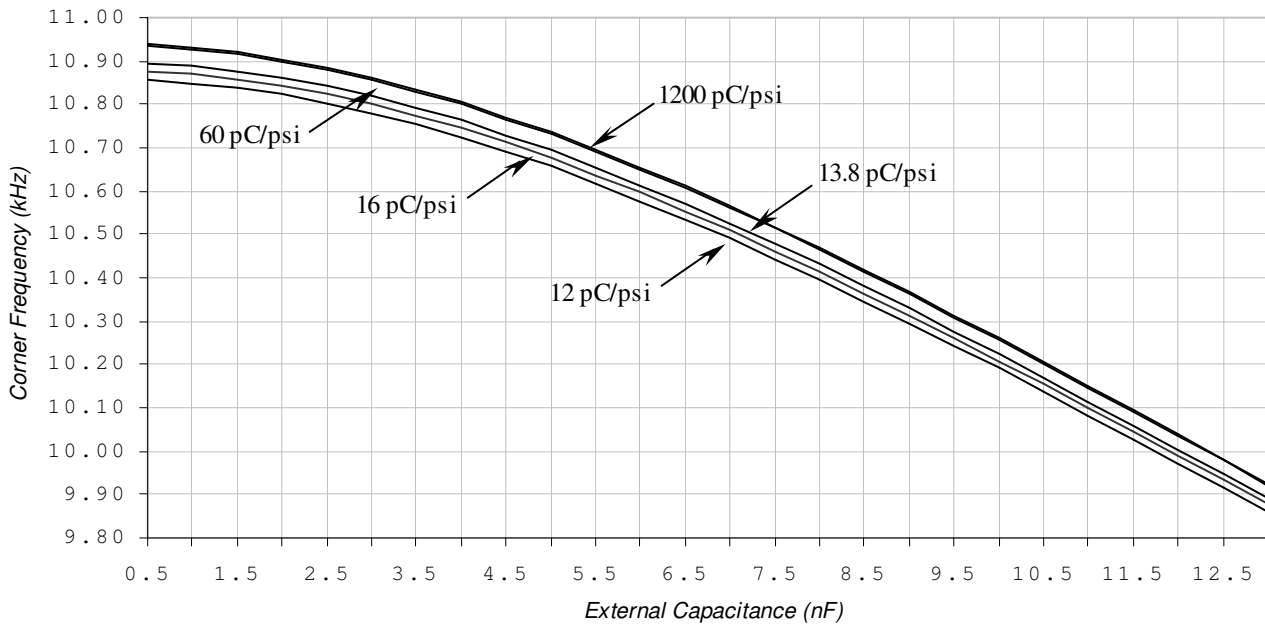


Figure 1: Low-Pass Filter option set to 'High'. 'External Capacitance' is the pole-to-pole cable capacitance plus the capacitance of the sensor

Typical Low Frequency Corner vs. External Capacitance (Low Pass filter option set to 'Low')


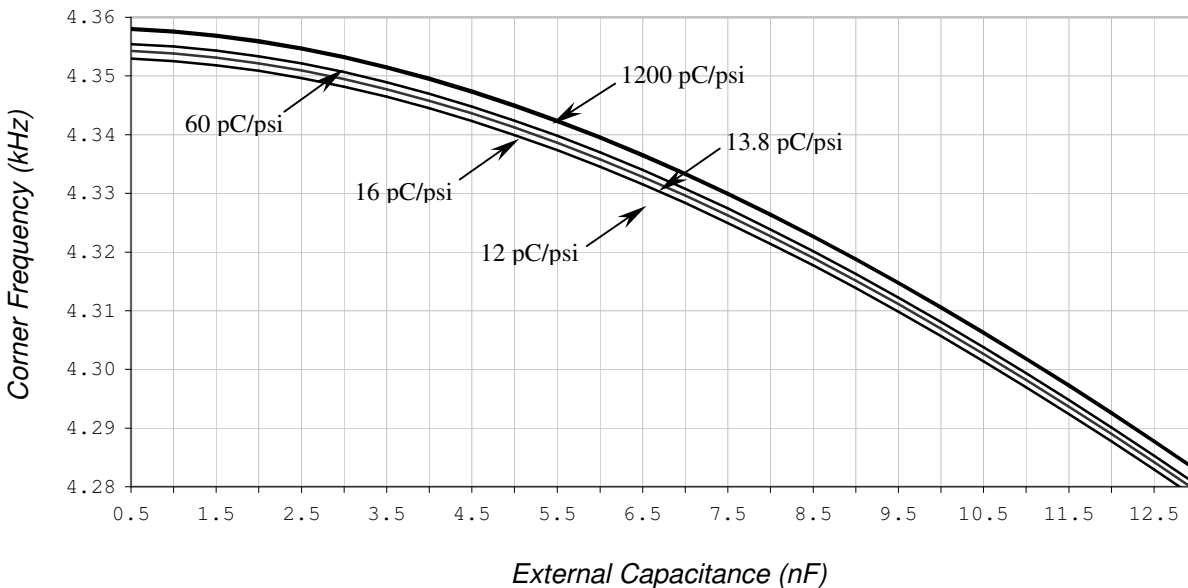


Figure 2: Low-Pass Filter option set to 'Low'. 'External Capacitance' is the pole-to-pole cable capacitance plus the capacitance of the sensor


Dimensional Drawings

(Dimensions in mm and [inches])

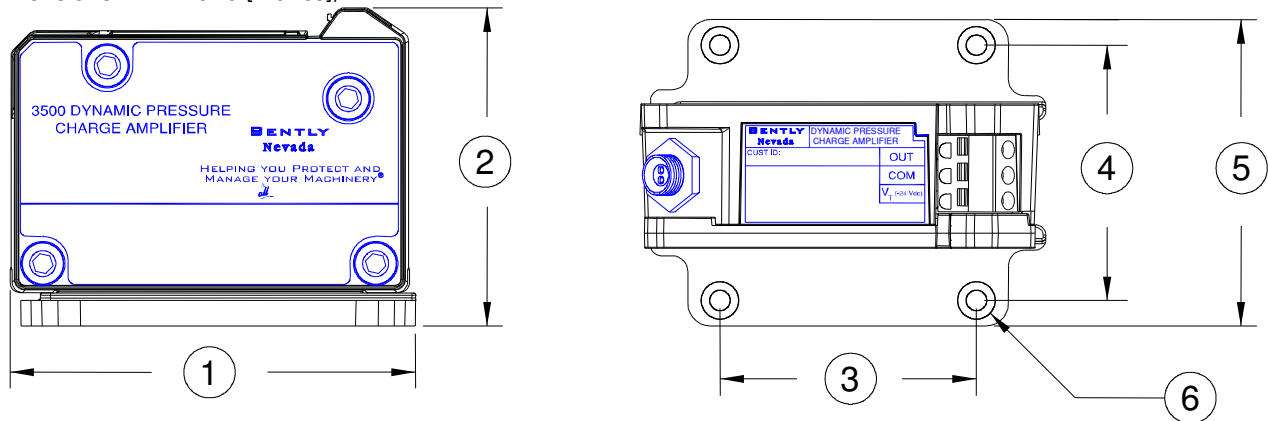

1	81.3 [3.20] maximum	4	50.80 [2.000]
2	63.5 [2.50] maximum	5	61.2 [2.41] maximum
3	50.80 [2.000]	6	Counterbore 7.37 [.290] diameter x 2.67 [0.105] deep, 4.01 [0.158] diameter through

Figure 3: 350500 Panel Mount Option

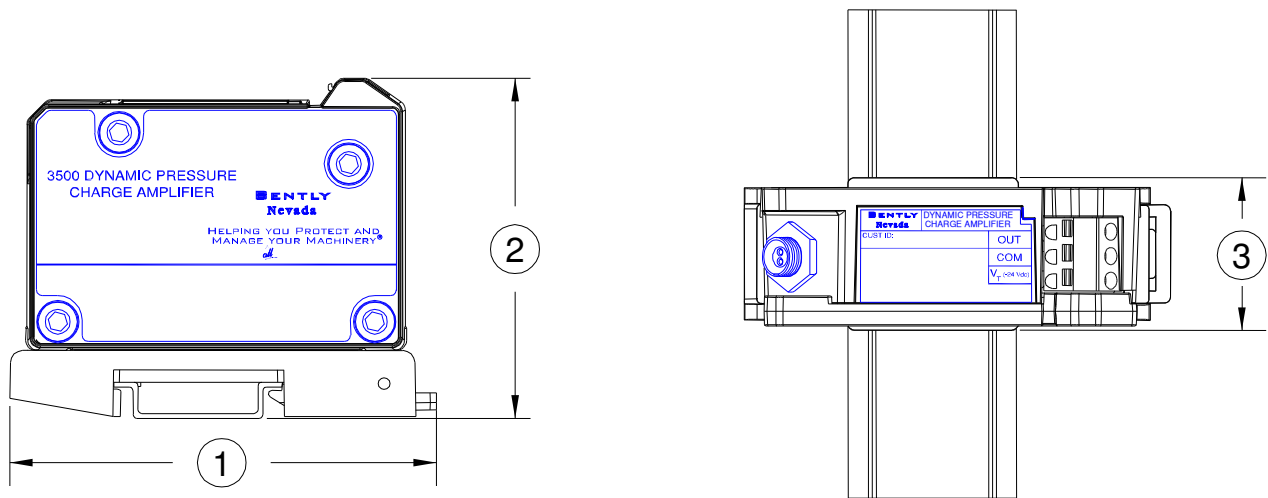

1	89.4 [3.52] maximum
2	70.8 [2.79] maximum
3	31.7 [1.25] maximum

Figure 4: 350500 DIN Mount Option

Bently Nevada is a trademark of General Electric Company.

Copyright 2000. Bently Nevada LLC.
 1631 Bently Parkway South, Minden, Nevada USA 89423
 Phone: 775.782.3611 Fax: 775.215.2873

www.ge-energy.com/bently

All rights reserved.

Specifications and Ordering Information
 Part Number 145828-01
 Rev. L (04/07)